

swiss coffee competence


www.schaerer.ca

barista



Cup for cup Top espresso quality



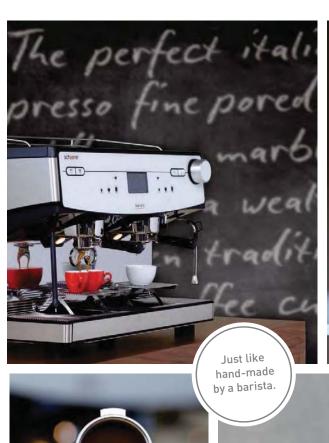









PERFECT BARISTA CRAFTSMANSHIP



Top espresso quality

You will be surprised how easy it is to prepare a perfect Italian espresso with the Schaerer Barista. All you have to do is insert the portafilter and press the button – and a tasty espresso will pour straight into the cup. The machine can provide single, double or triple espressos via a single or double outlet, and the


portafilter is detected automatically. The Schaerer Barista will also dispense the exact amount of coffee, grind it and tamp it automatically for you. This not only ensures that the desired recipe is followed precisely, but also guarantees the consistent flavour and high quality of the beverages.

Authentic sounds

Knocking out the portafilter by hand or frothing the milk for espressobased coffee specialities such as cappuccino or latte macchiato: these authentic sounds and the elegant Italian design give the Schaerer Barista the appearance of a portafilter machine and create a sense of Italian flair.

Perfect milk foam

Alongside espressos, the Schaerer Barista can also prepare perfect milk foam for cappuccinos and latte macchiatos: you can store up to three different milk foam consistencies and temperatures with the fully automatic Supersteam preparation method, while also frothing milk the traditional way using the manual steam wand. So you are free to create wonderful works of latte art.

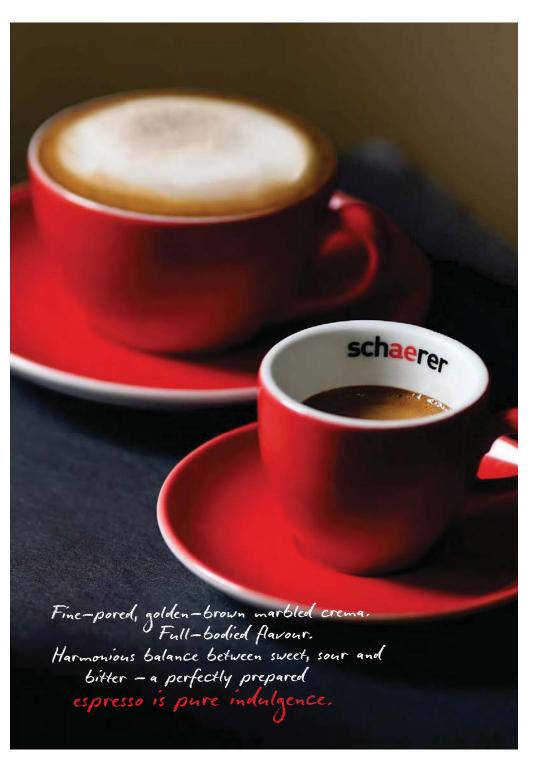









With the Schaerer Barista, everyone can prepare the classic Italian espresso meeting equally high standards.

Process reliability for restaurant and café chains

Our service technicians will configure the perfect settings for tasty espressobased coffee specialities in your coffee shop. They will work with you to develop tasty recipes based on their extensive coffee expertise, and will ensure that the recipes can be reproduced precisely in every branch – regardless of who is operating the Schaerer Barista. Do you have special beverage sizes? The espresso machine offers maximum flexibility in this regard: the espresso can be prepared in any size without changing the flavour, and the desired amount of milk or milk foam can be added.

Playground for baristas

The Schaerer Barista offers you entirely new ways of expressing your coffee expertise. It enables you to set all of the relevant parameters individually for your desired taste profile to get the best out of each espresso bean. The two integrated grinders allow you to use different types of beans, with the option of adding extra recipes for roast coffee blends in external grinders if desired. 2







Easy cleaning

Cleaning the Schaerer Barista is

just as easy as preparing espresso

specialities: simply place a cleaning

tablet in the portafilter fitted with a

blind filter, insert into the machine

and start the automatic cleaning

programme - done.

Whether it is in a coffee bar, a coffee shop or an Italian restaurant, the Schaerer Barista ensures easy handling and economical working methods. The preset recipes, intuitive operating concept and visualisation of the preparation processes on the display minimise the amount of training required so that every employee can prepare an exquisite espresso in next to no time. As all of the key steps take place inside the espresso machine, it also takes up less space. As an additional advantage, the preset dispensing of the coffee and the integrated grinders reduce the amount of coffee grounds

Working efficiently

MORE EFFICIENCY

FOR YOUR DAILY

BUSINESS

EQUIPMENT AND FUNCTIONS



Automatic portafilter detection: Single shot, single spout Double shot, single spout Double shot, double spout Tripple shot, double spout



Two integrated grinders grind the coffee directly into the portafilter. Automatic tamping with optimum compression pressure.



Heated cup storage, can be pushed back to open (soft close).



Two air-cooled bean hoppers for different types of bean, e.g. espresso and coffee.



Touch display for easy software setup.



Monitoring of brewing time with software-supported grind level adjustment.



The SteamIT brings up to two cups to the ideal temperature.



Separate hot water outlet with two dispensing buttons for different beverage sizes.



The barista key allows you to adapt the espresso strength to the preferences of the quest (+/- 15 percent).



Italian flair and authentic sound effects when you knock the grounds out of the portafilter into the external grounds container. Space-saving design, as the grounds container is located under the machine.



Up to twelve beverage recipes can be stored in total.



Use of additional coffee varieties possible via "external ground coffee" function key for each brewing group.



Cup tray can be raised for clean beverage dispensing.



Lighting for best possible visibility in work area.

MILK & MILK FOAM



Milk foam preparation [fully automatic via Supersteam].

Produce hot milk and milk foam automatically in up to three different consistencies. Top milk foam quality.



Manual milk foam preparation via Powersteam.

CLEANING





Automatic cleaning of coffee-carrying parts using blind filter and tablet



Drip tray consists of separate parts which can be cleaned in the dishwashe

TECHNICAL DATA





TECHNICAL DATA

| tegory | Equipment and options | Schaerer Barista | Category | Equipment and options | Schaerer Barista |
|---------------------------|--|------------------|---------------------------|--|--------------------------|
| ecommended aily output | Espresso | 300 | Steam | Powersteam | s |
| | Coffee/café crème | 240 | | Supersteam | S |
| everage output | Espresso | 300 | Additional features | 5 Heated cup storage | S |
| er hour | Coffee/café crème | 240 | | SteamIT steam cup warmer | S |
| | Hot water [l] | 48 | | Lighting | S |
| | Steam | S | | High feet | S |
| | User panel and touch screen | S | | M2M Coffee Link | 0 |
| | Number of beverages possible (programmable) | 12 | Payment systems | Connection of dispensing equipment/cash registers via e-protocol | l s |
| | Outlet height (from portafilter outlet) [mm] | 15.5 | Colours | Standard chrome steel | S |
| | Cup platform can be adjusted manually | s | Dimensions | Width [mm] | 755 |
| | Hot water dispensing, right | S | Dimensions | Width [mm] Depth [mm] | 548 |
| | Simultaneous preparation of coffee and hot water | S | | Height [mm] | 592 |
| | | | | Weight (net) [kg] | 75 kg |
| | Single shot, single spout (porta filter volume: 8-11 g) | S | Power supply | 1L, N, PE: 220–240 V– 50/60 Hz | 5000 - 5800 W 32 A |
| | | | Power supply | 2L, PE: 208-240 V 2~ 60 Hz | 4400 W / 5700 W 30 A |
| | | 0 | | 2L, PE: 208-240 V 2~ 60 Hz 2L, PE: 200 V 2~ 50/60 Hz | 3900 W 24 A |
| | Double shot, single spout (porta filter volume: 10-16 g) | | | 3L, N, PE: 380-415 V 3N- 50/60 Hz | 6000 - 7000 W 3 x 16 A |
| | | | 45 B 4 R 1 B 1 B 1 B 1 | 3L, PE: 208/240 V 2~ 60 Hz | 6600 W / 8600 W 30 A |
| | | | | 3L, PE, 220-240 V 2~ 50/60 Hz | 5000 w 7 8000 W 3 x 24 A |
| | Double shot, double spout [porta filter volume: 10-16 g] | 5 | | | |
| | | | Water supply and disposal | Mains water supply Waste water outlet | 5 |
| | | | | waste water outlet | S Company |
| | Triple shot, double spout (porta filter volume: 15-21 g) | 0 | | |) s s |
| | Steam wand | s | | | |
| ean hoppers | 2 grinders | s | | | |
| | Bean hopper [g] | 550 | | | |
| | Use of external ground coffee | s | | | |
| | Hot water and steam boiler | s | | | |
| onter's and brewing unit | Simultaneous operation | 5 | | | |
| | Brewing unit | 5 | | | |



Headquarter

Schaerer AG

Allmendweg 8 4528 Zuchwil Switzerland info@schaerer.com www.schaerer.com

Subsidiaries

Schaerer USA Corporation

15501 Red Hill Avenue, Suite 200 Tustin, CA 92780 USA info@schaererusa.com www.schaererusa.com

Schaerer Deutschland GmbH

Siechenlach 1 89173 Lonsee-Urspring Germany info@schaerer-gmbh.de www.schaerer-gmbh.de

Schaerer Benelux - Guy van Bogaert

Boomsesteenweg 608 2610 Antwerpen-Wilrijk Belgium info@schaerer.be www.schaerer.be







Supramatic Inc. 2-1020 Brevik Place Mississauga, Ontario L4W 4N7 - CANADA

Toll Free: 877-465-2883 Tel: 905-279-3666 Fax: 905-279-2553

info@supramatic.com www.supramatic.com



Supramatic Inc. 2-1020 Brevik Place Mississauga, Ontario L4W 4N7 - CANADA

Toll Free: 877-465-2883 Tel: 905-279-3666 Fax: 905-279-2553

info@supramatic.com www.supramatic.com

www.schaerer.ca

Version 05.2018 - Subject to change.